




**CHEVILLAGE**



# CHEVILLE NYLON NP

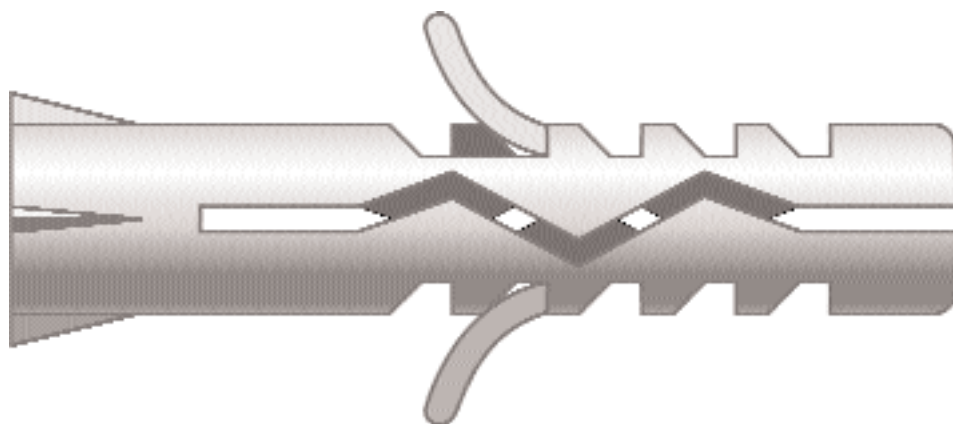


## CHEVILLE NYLON NP

CODE	DESIGNATION	QTE/BOITE	QTE/CARTON	KG/CARTON		
CN05025	Cheville NP 5-25 (pour vis Ø 3,5 mm)	400	7 200	7	5	25
CN06030	Cheville NP 6-30 (pour vis Ø 3,5-4 mm)	200	3 600	5	6	30
CN08040	Cheville NP 8-40 (pour vis Ø 4-5 mm)	200	3 600	7	8	40
CN10050	Cheville NP 10-50 (pour vis Ø 5-6 mm)	100	1 800	5	10	50
CN12060	Cheville NP 12-60 (pour vis Ø 8 mm)	50	900	4	12	60
CN14070	Cheville NP 14-70 (pour vis Ø 10 mm)	25	450	2	14	70
CN16080	Cheville NP 16-80 (pour vis Ø 12 mm)	25	450	3	16	80

### > APPLICATIONS

Fixation de signalisation.



### Tableau de résistance au efforts dans la pierre


			Charges recommandées (kN)		Charges recommandées (kg)	
TYPE	Diamètre de perçage	vis	Traction	Cisaillement	Traction	Cisaillement
NP 5x25	5	M 3	0.04	0.04	4	4
NP 6x30	6	M 4	0.06	0.06	6	6
NP 7x38	7	M 4	0.07	0.07	7	7
NP 8x40	8	M 5	0.09	0.09	9	9
NP 10x50	10	M 6	0.20	0.20	20	20
NP 12x60	12	M 8	0.40	0.40	40	40
NP 14x80	14	M 10	0.50	0.50	50	50

En prenant en compte le facteur de sécurité de 4

### MATERIAUX SUPPORT



### MODE DE POSE

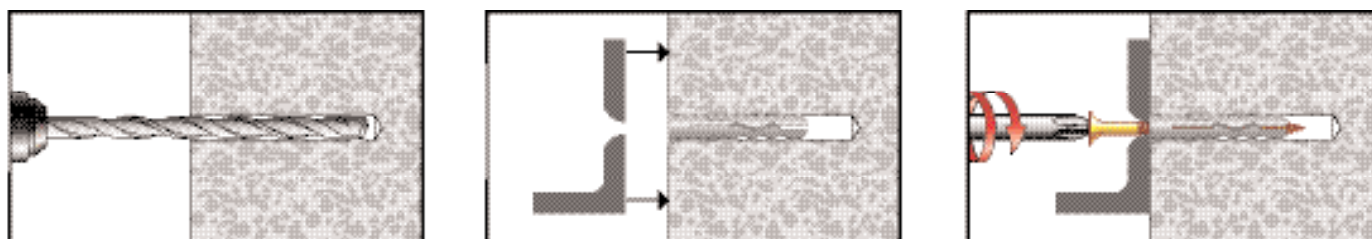

### Siège social et show room

114a rue principale - 67240 GRIES

Tél. : 03 88 72 42 41 - Fax : 03 88 72 17 15

E-mail : alsafix@alsafix.com

### Agence de Paris

34, avenue de Bobigny - 93135 NOISY-LE-SEC

Tél. : 01 48 44 44 59 - Fax : 01 48 44 44 54